




# Entry Doors - Natural - Wood

## Energy Performance

Model	Details	Glass dimensions	U-factor (W/m <sup>2</sup> - K)	Solar heat gain (SHGC)	Energy Rating ER	ENERGY STAR zone(s) 2015	ENERGY STAR zone(s) 2010	NFRC
<a href="#">PB-LF,LOF-ARG-CL-ARG-LOF,11/4"</a>	Th3	Full Lite	1.02	0.27	32	1 2 3	A B C D	<a href="#">MPE-M-37</a>
<a href="#">PB-LT,LOF-ARG-CL-ARG-LOF,11/4"</a>	Th3	3/4 Lite	1.14	0.21	26	1 2 3	A B C D	<a href="#">MPE-M-37</a>
<a href="#">PB-LH,LOF-ARG-CL-ARG-LOF,11/4"</a>	Th3	1/2 Lite	1.25	0.16	21	1 2	A B C	<a href="#">MPE-M-37</a>
<a href="#">PB-LQ,LOF-ARG-CL-ARG-LOF,11/4"</a>	Th3	1/4 Lite	1.36	0.09	14	1 2	A B C	<a href="#">MPE-M-37</a>
<a href="#">PB-LF,LOF-ARG-CL-ARG-LOF,1"</a>	Th3	Full Lite	1.42	0.27	24	1 2	A B C	<a href="#">MPE-M-37</a>
<a href="#">PB-LT,LOF-ARG-CL-ARG-LOF,1"</a>	Th3	3/4 Lite	1.42	0.21	20	1 2	A B C	<a href="#">MPE-M-37</a>
<a href="#">PB-LH,LOF-ARG-CL-ARG-LOF,1"</a>	Th3	1/2 Lite	1.48	0.16	16	1	A B	<a href="#">MPE-M-37</a>
<a href="#">PB-LQ,LOF-ARG-CL-ARG-LOF,1"</a>	Th3	1/4 Lite	1.53	0.09	11	1	A B	<a href="#">MPE-M-37</a>

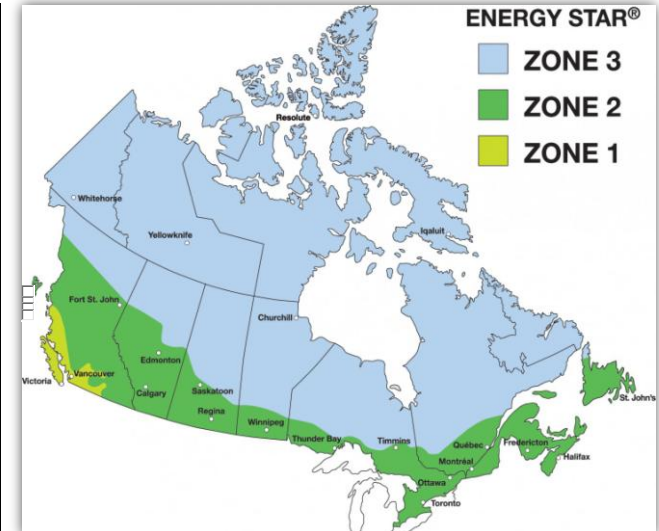

**Th3:** Triple glazed insulated glass unit (three glass panes).

**SDL :** Simulated Divided Light is composed of small bars glued directly on both sides of the glass surface to simulate the appearance of true divided lites.

**U-factor:** (W/m<sup>2</sup>-K) The lower the U-factor, the better the ability to resist to heat transfer.

**SHGC:** Solar Heat Gain Coefficient, the higher the SHGC, the more the solar heat is transmitted inside.

**R-value:** (1 / U-factor) A high R-value indicates a better heat resistance, thus more effective insulation.

The values are determined according to the procedure of the National Fenestration Rating Council (NFRC).

**ER:** The Energy Rating is the result of a formula taking into account the U-value, the SHGC and the airtightness of the product. The ER value measures the overall performance of a window. The higher the value, the better the product efficiency in terms of energy.

## Structural Performance

PERFORMANCE TESTING IN ACCORDANCE WITH AAMA/WDMA/CSA 101/I.S.2/A440-08								
	Performance grade (PG)	Airtightness	Water tightness	Wind load resistance	Screen resistance	Resistance to forced entry	Usability	Structural test
Entry Doors - Wood Natural and Ext. aluminum cladding	R-CP60-SD	A3	B4	C3	Successful	Successful	Successful	PES 75

**PG:** Performance Grade from the NAFS-08 harmonized standard (North American Fenestration Standard) for a given size on a scale from PG15 to PG100. The higher the value is, the better the product efficiency.

**Airtightness:** Resistance to air exfiltration/infiltration on a scale ranging from A1 to A3. The higher the value, the greater the sealing.

**Water tightness:** Resistance to water infiltration on a scale ranging from B1 to B7. The higher the value, the greater the sealing.

**Wind load resistance:** Resistance to wind pressures on a scale ranging from C1 to C5 without breakage or permanent deformation. The higher the value, the greater the resistance.

**Screen resistance:** Resistance rating without damage or permanent deformation while remaining firmly attached to the window under a force of 60 Newtons outwards.

**Resistance to forced entry:** Capacity when locked to withstand a forced entry under specified load and conditions for a rating of F10 or F20. The higher the value, the greater the resistance.

**Usability:** Test for measuring the force required to initiate and maintain the opening movement of the window or the door.

**Structural test:** Structural test pressure (STP) [greater than values specified in pounds per square foot (psf) or in pascals (Pa)] supported before permanent deformation measured on the jamb of the sash. Maximum values indicated.